



# Verizon Ellipsis Jetpack MHS800L Battery Replacement

This guide will show the you how to replace the battery.

Written By: Richard J Porras



## INTRODUCTION

What you can expect from this guide is a step by step process on how to remove the battery on a Verizon Ellipsis Jetpack MHS800L.


---



### TOOLS:

- [Metal Spudger Set](#) (1)
  - [64 Bit Driver Kit](#) (1)
  - [iFixit Opening Picks set of 6](#) (1)
  - [Jimmy](#) (1)
  - [Tweezers - Pro ESD Pointed](#) (1)
-

## Step 1 — Plastic Case

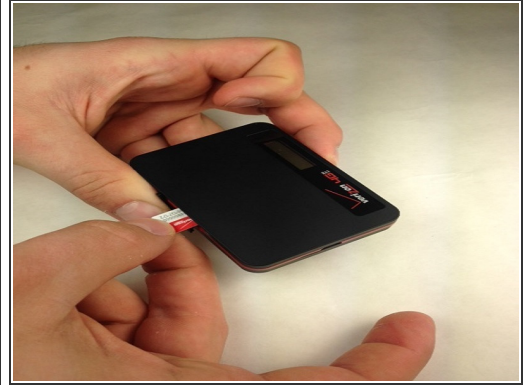

- Remove the SIM card, that is located on top of the Jetpack.

## Step 2



- With the device on its back and the label facing you, remove the rubber screw cover on the top left corner of the device.
- Under the rubber circle, remove the 1.25 mm screw using a Philips #00 screwdriver.

### Step 3



- Remove three 1.25 mm screws.


### Step 4



- Use a plastic opening tool at the seams and pry open the case.



## Step 5

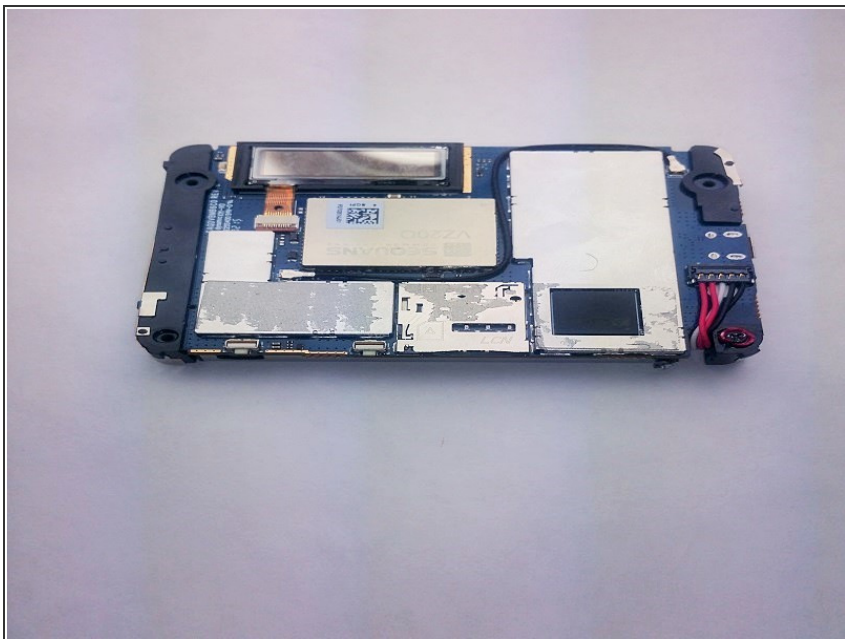

- Once the cover is off, this is what your device will look like.


## Step 6 — Battery



- Once you have the case off of your device gently pull your battery away from the device.


⚠ Do not attempt to completely remove the battery, as it is still attached to the motherboard by wires.

## Step 7

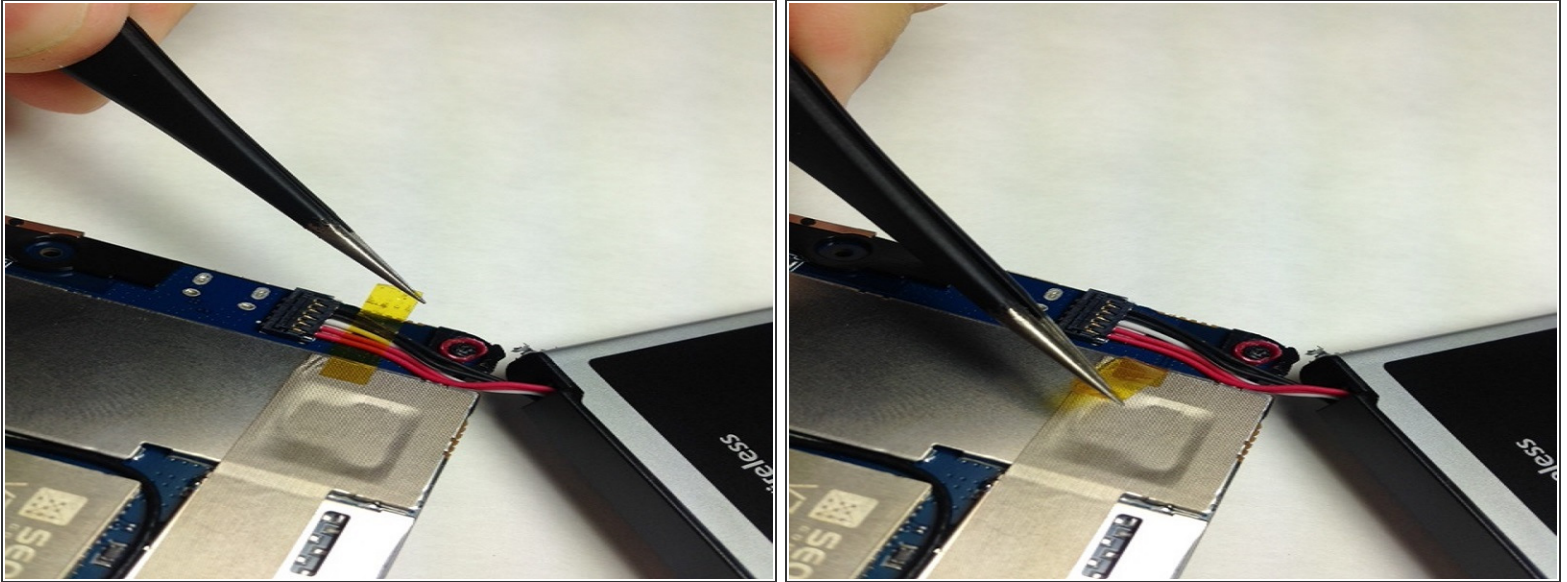


- With a pair of ESD Tweezers remove the yellow tape covering the battery wires.


## Step 8

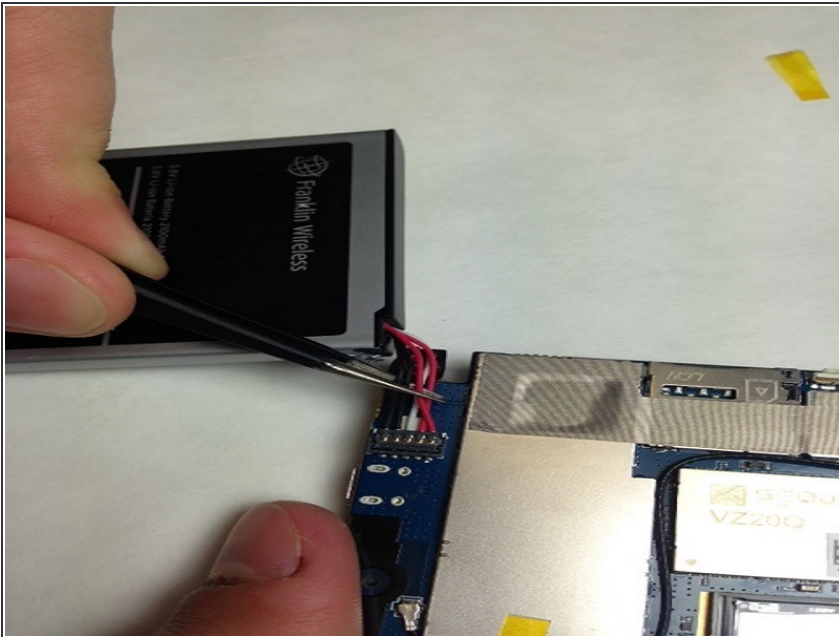

- After removing the tape you may use the ESD Tweezers to remove the wiring harness from the circuit board.

 Do not squeeze the wires to hard you may damage them and cause a short.

## Step 9

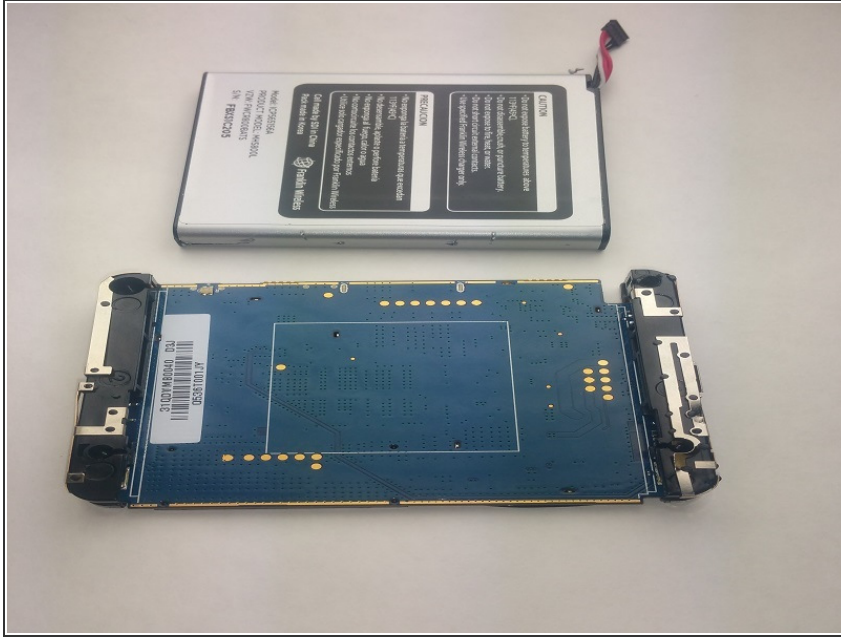

- You may now replace the battery in your Verizon Ellipsis Jetpack MHS800L.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-21 08:24:14 AM.